
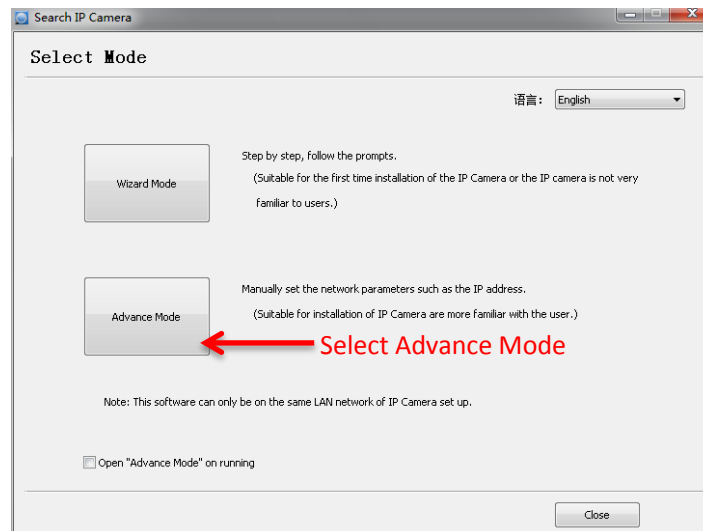
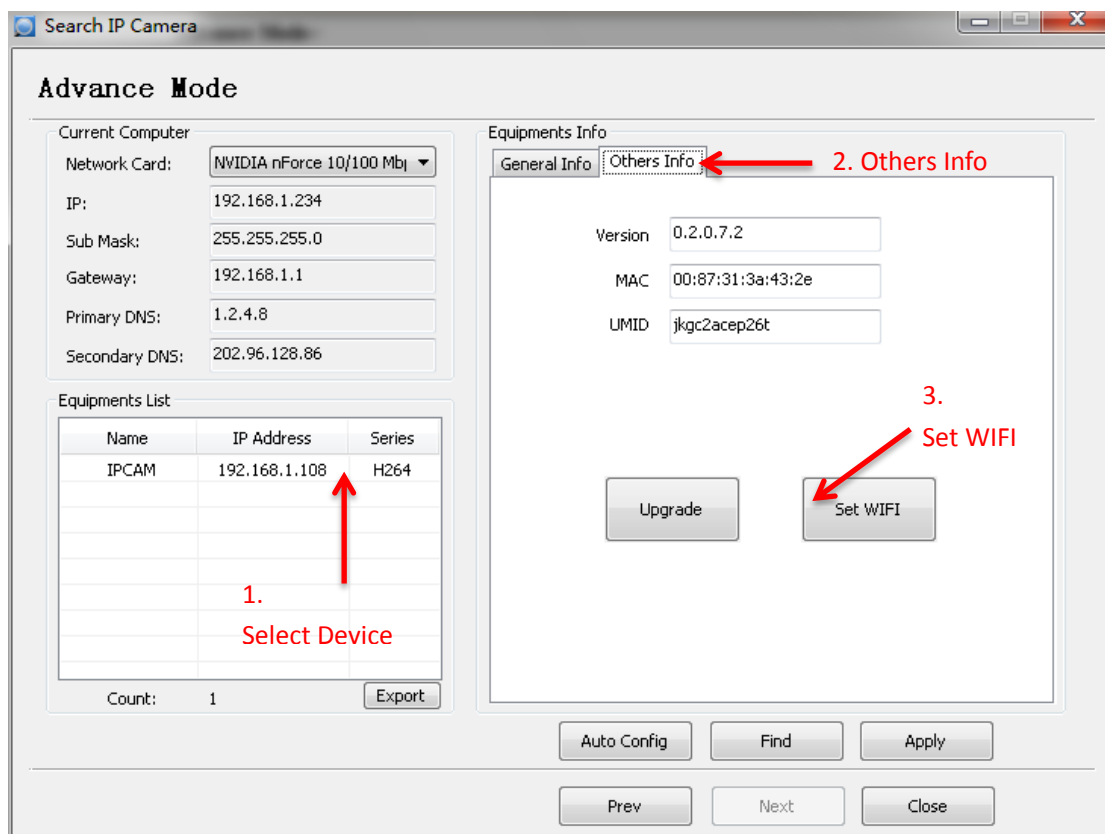


一、Set WIFI by IPCamera Finder


Open “IPCamera Finder”  in the cd rom




Advance Mode




Input your User and Password:

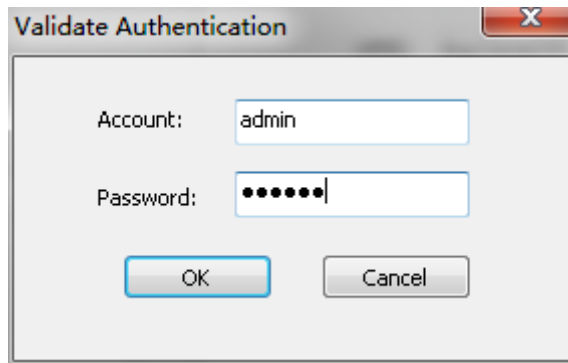

Default User: admin , Default Password: 123456 。

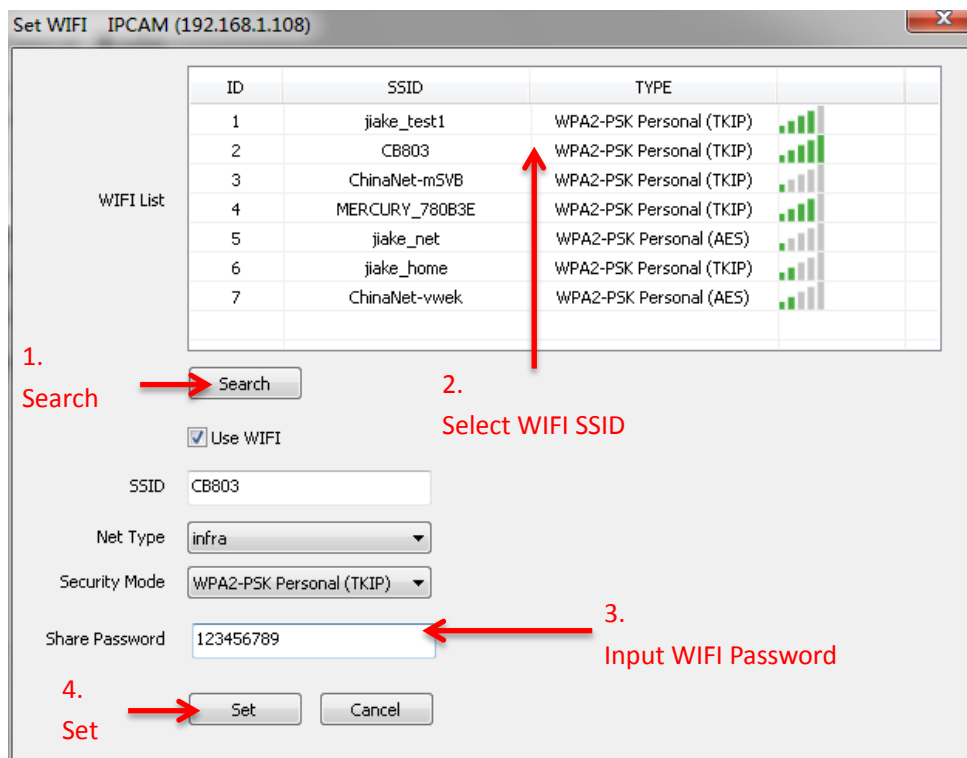


Note:
after set WIFI, remove the wired network.

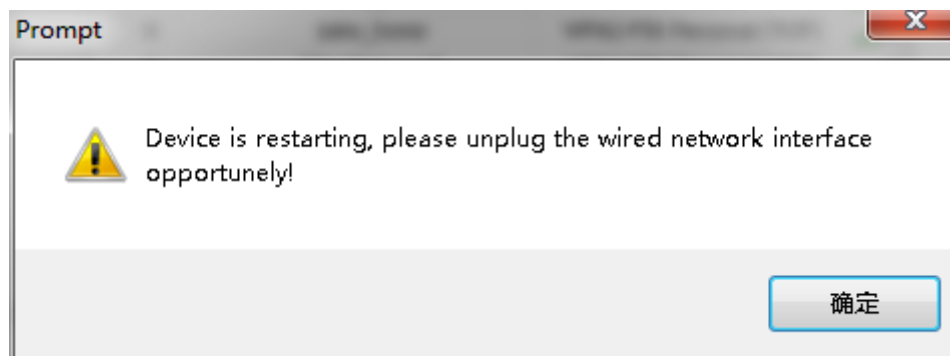


二、Set WIFI by WEB


Open “IPCamera Finder”  in the cd rom

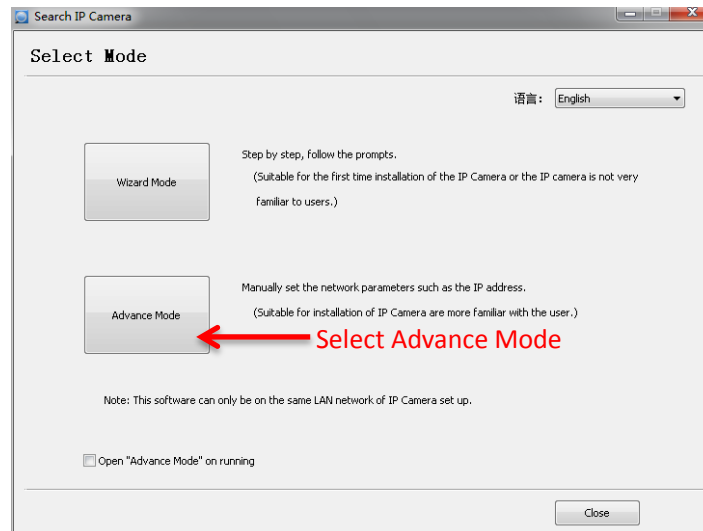

Advance Mode

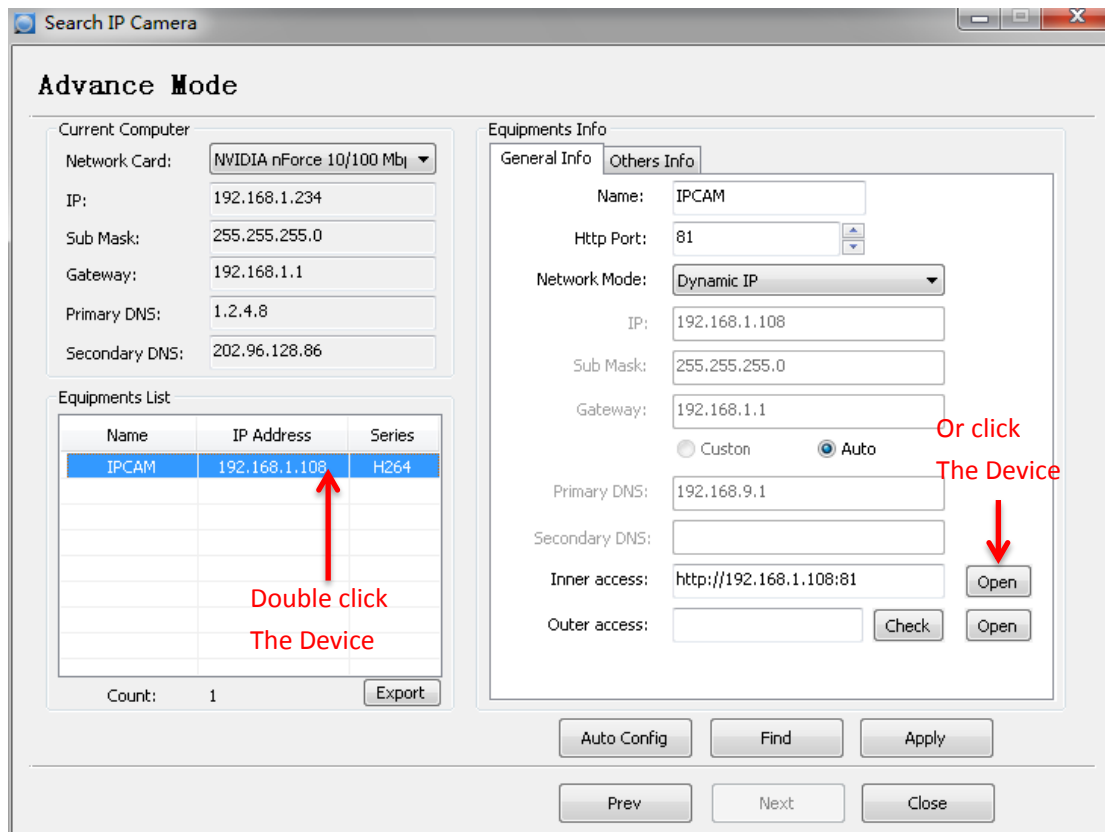

IE WEB Windows, Default User: admin , Default Password: 123456 。

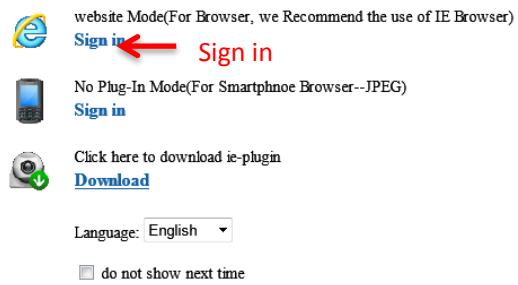

go to setting, select Wireless Lan Setting



Click here to setting

Network Settings

- Basic Network Settings
- Wireless Lan Settings** ← 1. Click this
- DDNS Settings
- UPnP Settings
- Cloud Settings

Record Management

- SD Card Record
- Local Record

Alarm Settings

Video Settings

System Settings

← Back

Wireless Lan Settings

Wireless Network List

ID	SSID	TYPE	
1	ChinaNet-xingjingmao	WPA2-PSK Personal (AES)	
2	jiake_test1	WPA2-PSK Personal (TKIP)	
3	YOYO	WPA2-PSK Personal (AES)	
4	HiWiFi_058174	WPA2-PSK Personal (AES)	
5	CB803	WPA2-PSK Personal (TKIP)	
6	Tenda_0B9008	WPA-PSK Personal (AES)	
7	MERCURY_780B3E	WPA2-PSK Personal (TKIP)	
8	jiake_home	WPA2-PSK Personal (TKIP)	

2. select WIFI SSID

Using Wireless Lan

SSID: CB803

Network Type: Infra

Encryption: WPA2-PSK Personal (TKIP)

Password: 123456789 ← 3. input WIFI Password

4. click SET to save

三、Set WIFI By WPS

If your WIFI Router support WPS, you can set WIFI by WPS.

1. press WPS button in Router;
2. and then press RESET button in 2 minters.

Note: RESET button at the bottom of the device.



四、Change Password

启用用户设置界面如下图所示，

▶ Network Settings	Users Settings			
▶ Record Management	User:	Password:	Type it again:	Group
▶ Alarm Settings	admin	•••••	•••••	Administrator ▼
▶ Video Settings	operate	•••••	•••••	Operator ▼
▶ System Settings	visit	•••••	•••••	Visitor ▼
Device Info				Visitor ▼
Alias Settings				Visitor ▼
Users Settings				Visitor ▼
Date&Time Settings				Visitor ▼
Multi-Device Settings				Visitor ▼
PTZ Settings				Visitor ▼
Maintenance				Visitor ▼
Log				Visitor ▼
← Back				

1.Click this

2.Change Password

3.click SET to save

Set Refresh

Note:

User (1-8),Password(2-11). Support number and English letters.